

E-mail: sales@unique-energy.eu



Battery Type ULR14430

Specification 3.7V/650mAh

Document NO		Data	
Edition		Page	3 page
Approved	Checked	Design	

E-mail: sales@unique-energy.eu



1. Preface

The purpose of this product specification is to provide technical information for the rechargeable Lithium-ion cylindrical battery ULR14430, manufactured and supplied by Unique Energy.

2. Description and Model

2.1 Description	Rechargeable Lithium-ion cylindrical battery
2.2 Model	ULR14430

3. Specification

3.1 Capacity	650mAh
3.2 Charging Voltage	4.20V
3.3 Nominal Voltage	3.7V at 0.2C mA
3.4 Standard Charging Method	Constant current:0.5C ₅ mA Constant voltage 4.20V
3.5 Cut-off Discharge Voltage	3.00V
3.6 Max. Discharge Current	1.5C ₅ mA
3.7 Max. Charge Current	1C ₅ mA
3.8 Cycle Life	>500 cycles
3.9 Ambient Temperature	
for Standard Charge	0°C ~ 45°C
for Discharge	-20°C ~ 60°C
3.10 Storage	
for within the temperature	-20°C ~ 60°C
for within the humidity	≤ 75%
3.11 Energy Density	
Wh/L	~360
Wh/Kg	~135
3.12 Weight of Bare Cell	~18g
3.13 Charge State Internal Impedance	<80mΩ

4. Appearance

Appearance shall be free from any remarkable scratch, flaws, rust, discoloration or electrolyte leakage (visible or by smell)

5. Standard Test condition

5.1 Environment Conditions

Unless otherwise specified, all test stated in this Product Specification are conducted within the temperature 15~25°C and the humidity 45~85%RH.

5.2 Test Equipment

(1) Impedance meter


The impedance meter with AC 1kHz should be used

6. Test Procedure and Its Standard

Item	Measuring Procedure	Standard
6.1 Appearance	Visual	No Defect and Leak
6.2 Dimension	Caliper	As item 8
6.3 Weight	Scale	As item 3.12
6.4 Maximum Charge Current	CCC V (Constant Current Constant Voltage)	$1C_5mA$
6.5 Full charge	CCCV	CC- $0.5C_5mA$ CV- 4.2V End-Current $0.01C_5mA$
6.6 Open Circuit Voltage	Within 1hr after full charge, measure Open circuit voltage	>4.10V
6.7 Internal Impedance	Measure the battery with 1kHz AC	<80m#
6.8 Discharge Capacity	Within 1hr after full charge, discharge until final discharge, at $0.2C_5mA$ and measure the capacity	>650mAh
6.9 Maximum Discharge Current	Until final discharge voltage	$1.5C_5mA$
6.10 Charge/Discharge Cycle Life	Charge: CCC V, CC - $0.5C_5mA$, CV- 4.2V End-Current $0.01C_5mA$ Discharge: $0.5C_5mA$ to 3.00V, This charge/discharge shall be repeated 500 times	Discharge capacity should be >70% of item 6.8
6.11 Leakage Proof	After full charging, the battery shall be stored at $40\pm 2!$ and humidity 80\$ 5% for 21 days	No leakage should be observed by visual inspection
6.12 Temperature Characteristics	1) After full charge at $20\pm 5!$, stand at $-20\pm 2!$ for 18h, then discharge at $0.2C_5mA$ and measure the capacity 2) After full charge at $20\pm 5!$, stand at $55\pm 2!$ for 2hrs, then discharge at $1C_5mA$ and measure the capacity	Discharge capacity should be >60% of item 6.8 and no abnormality on its appearance and structure
6.13 Charge Retention	After full charging, stand at $20\pm 5!$ for 28 days, measure the discharge capacity according to item 6.8	Discharge capacity should be >85% of item 6.8


7.1 Charge/Discharge Characteristics

Charge: CC / CV 4.2V, 0.5C₅mA,
 End-current 0.01C₅mA
 Discharge: 0.5C₅mA Cut-off at 3.00V
 Temperature: 25!

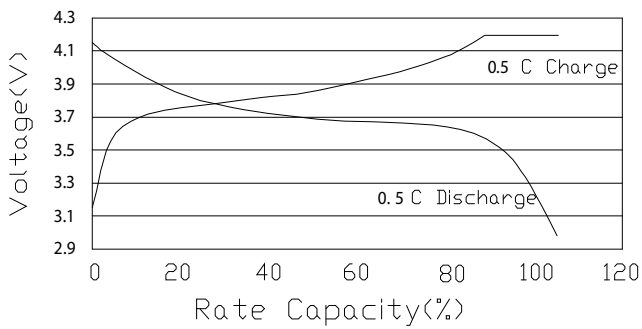


7.3 Temperature Characteristics

Charge: CC / CV 4.2V 0.5C₅mA,
 End-Current 0.01C₅mA
 Discharge: As item 6.10

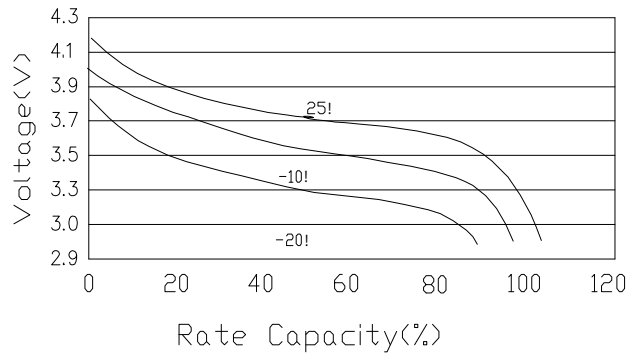

7.2 Charge/Discharge Cycle Life

Charge: CC / CV 4.2V 0.5C₅mA,
 End-Current 0.01C₅mA
 Discharge: 0.5C₅mA, Cut-off at 3.00V
 Temperature: 25!

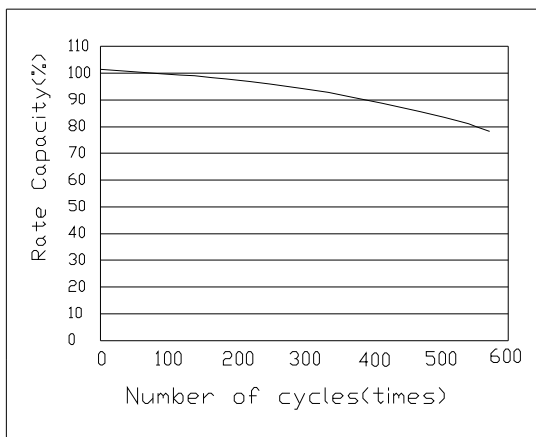

8. Dimension (Bare cell) mm

