




UE-9V220




Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

Nominal Voltage		8.4V	
Dimensions	Long (mm)	26.5 ⁺⁰ ₋₂	Weight Approx 45g
	Width(mm)	17.5 ⁺⁰ ₋₂	
	Height (mm)	48.5 ⁺⁰ ₋₂	
0.2C Discharge Capacity	Typical	220mAh	
	Minimum	210mAh	
Typical Internal Impedance		Less then 800mΩ	
Charge	Standard	22mA for 16hrs	
	Quite	44mA for 6~7h	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	<1 year	-10°c to 30°c
<3 months		-10°c to 40°c	

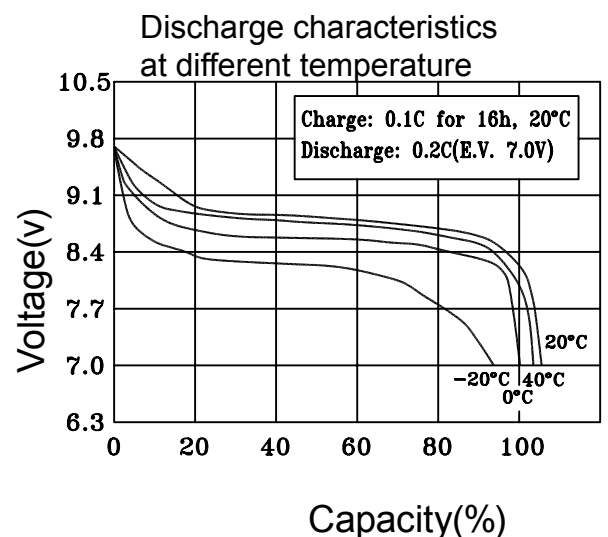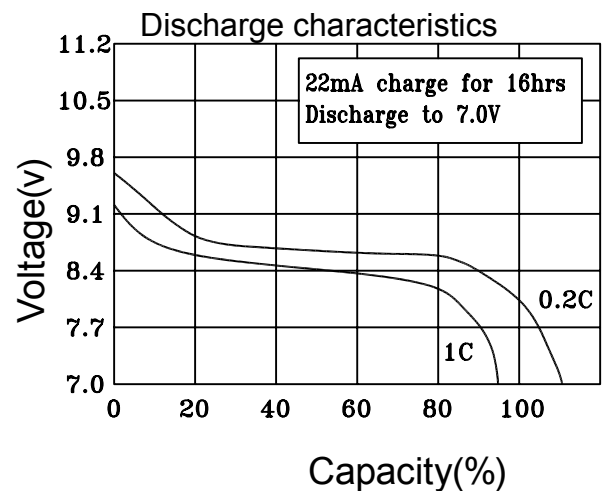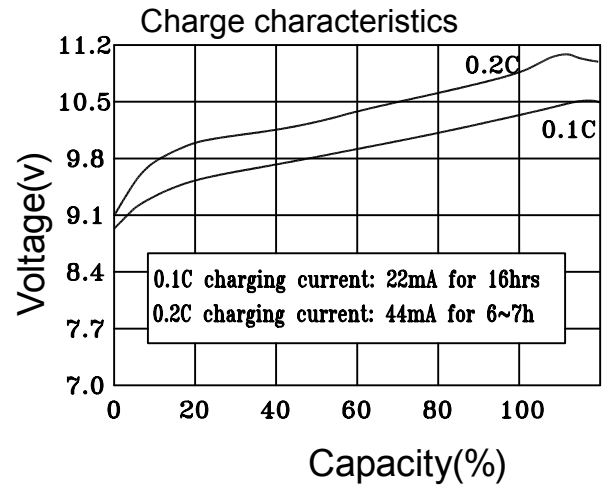

Cell dimmensions

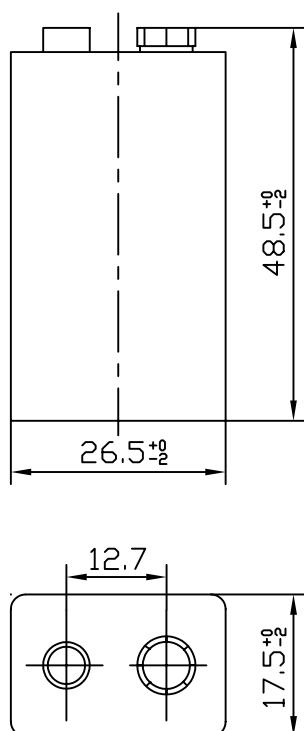

1:1