




UE700-5/4AAA




Ni-MH rechargeable cylindrical cell (Data Sheet)

Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	10.0±0.2mm	
	Height	50.0±0.3mm	
	Apx. Weight	13g	
0.2C Discharge Capacity	Typical	750mAh	
	Minimum	700mAh	
Typical Internal Impedance		Less than 30mΩ	
Charge	Standard	70mA for 16 hrs	
	Fast	700mA for about 75min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	< 1 year	-10°C to 30°C
< 3 months		-10°C to 40°C	

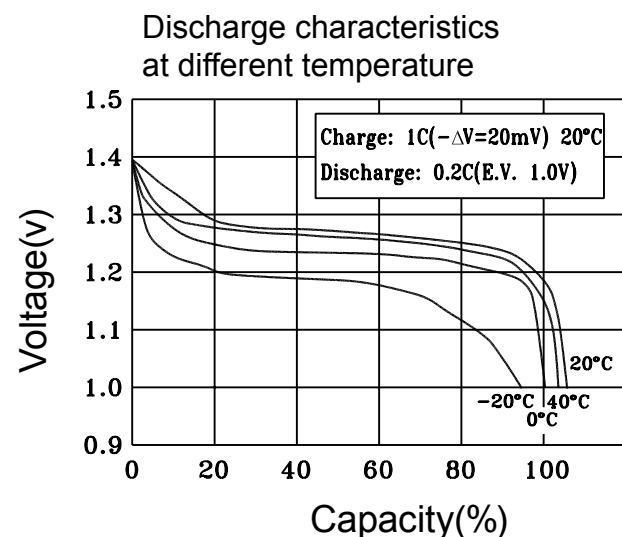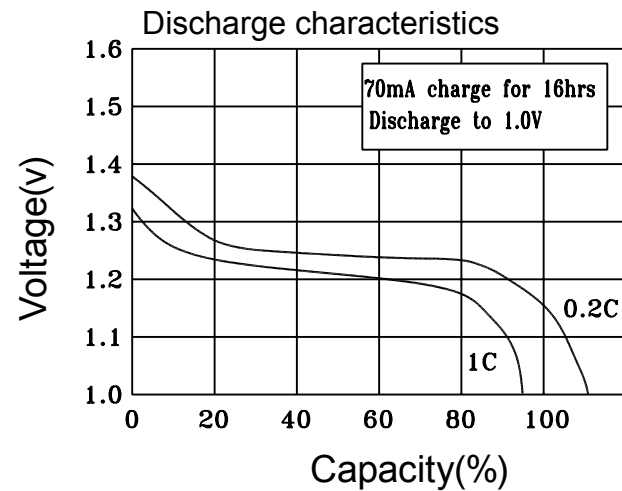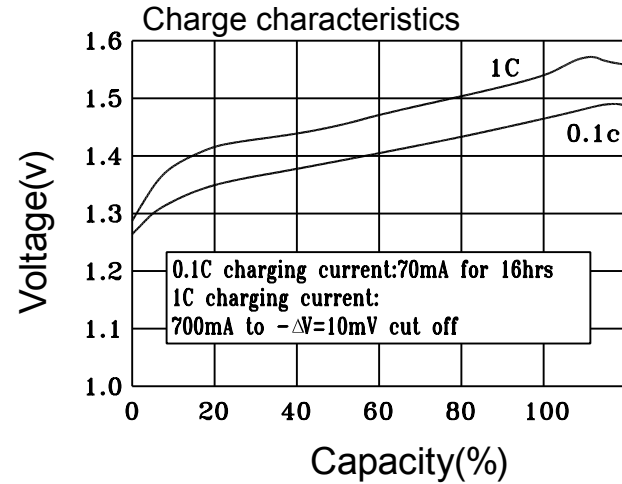

Cell dimensions

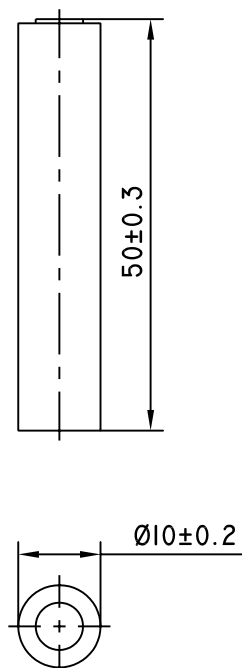

(With tube)

1:1