

UE750-F6




Ni-MH rechargeable cylindrical cell (Data Sheet)

Specification

Nominal Voltage		1.2V	
Dimensions	Thickness	5.8±0.2mm	
	Width	16.5±0.3mm	
	Height	48.0±0.5mm	
	Apx. Weight	18g	
0.2C Discharge Capacity	Typical	800mAh	
	Minimum	750mAh	
Typical Internal Impedance		Less than 30mΩ	
Charge	Standard	75mA for 16 hrs	
	Fast	750mA for about 75min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	< 1 year	-10°C to 30°C
< 3 months		-10°C to 40°C	

Cell dimensions

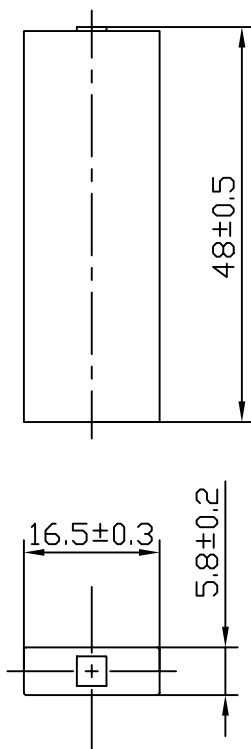

1:1

